


CAPACITANCE DECADE BOX

Model : CBOX-406

ISO-9001, CE, IEC1010

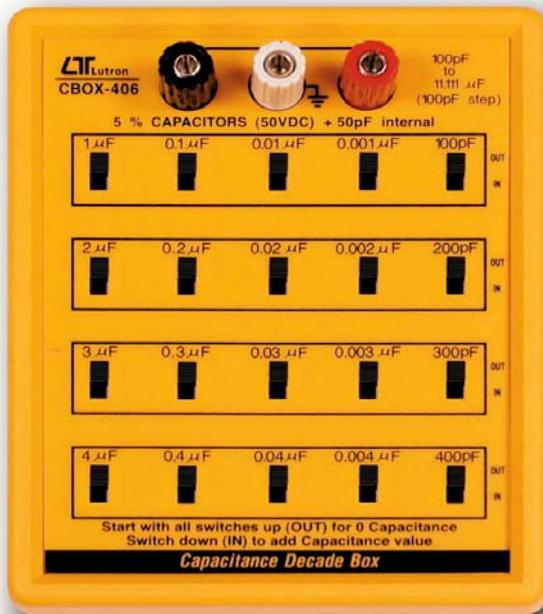

FEATURES

- * Pocket size, offering accurate, reliable performance.
- * 100 pF to 11,111 uF, wide range and high resolution (100 pF per step), practical and versatile tools.
- * With five decades of capacitance.
- * Slide switches that allow the user to simply add or subtract for desired value.
- * Terminals with multi way binding posts, one to switch shield case.
- * ABS plastic housing case, rugged components.
- * Applications :
 - Troubleshooting, maintenance
 - Education & Vocational training
 - Production line testing
 - Radio and TV services
 - Working standards
 - Research design & develop
 - Physics laboratory work



LUTRON ELECTRONIC

The Art of Measurement

CAPACITANCE DECADE BOX

Model : CBOX-406

FEATURES	
* Applications :	<i>General applications</i> <i>Troubleshooting, maintenance</i> <i>Education and Vocational training</i> <i>Production line testing</i> <i>Radio and TV services</i> <i>Working standards</i> <i>Research design & develop</i> <i>Physics laboratory work</i>
* Pocket size, offering accurate, reliable performance.	
* 100 pF to 11,111 uF, wide range and high resolution (100 pF per step), practical and versatile tools.	
* With five decades of capacitance.	
* Slide switches that allow the user to simply add or subtract for desired value.	
* Terminals with multi way binding posts, one to switch shield case.	
* ABS plastic housing case, rugged components.	

SPECIFICATIONS	
Range	100 pF to 11,111 uF (100 pF per step)
Accuracy	5% capacitors used throughout. <i>@ < 1 uF, 1 KHz test frequency</i> <i>@ >= 1 uF, 100 Hz test frequency</i>
Voltage Limit	50 V DC, non-polarized capacitors.
Internal Residual Capacitance	50 pF max.
Power Supply	None.
Operating Temperature	0 to 50 °C (32 to 122 °F).
Operating Humidity	Less than 80% RH.
Weight	304 g/0.69 lb.
Dimension	14.7 cm x 11.7 cm x 5.5 cm. (5.79 x 4.61 x 2.16 inch).
Accessory Included	Operation Manual..... 1 PC.
Optional Accessory	Test alligator clips, one pair, TL-05

OPERATION PROCEDURE	
1. Start with all switches up (OUT) for minimum capacitance.	
2. Switch down (IN) to add Capacitance value.	

* Appearance and specifications listed in this brochure are subject to change without notice. 1001-CBOX406